

2007-05-28

## Electricity Generation from a Microbial Fuel Cell Employing *Desulfovibrio Saalexigens*

Ping DING

Hai-bo SHAO

Guang-zhou LIU

Dong-xia DUAN

Ting MA

Si-jun CHEN

Jian-ming WANG

*See next page for additional authors*

---

### Recommended Citation

Ping DING, Hai-bo SHAO, Guang-zhou LIU, Dong-xia DUAN, Ting MA, Si-jun CHEN, Jian-ming WANG, Jian-qing ZHANG. Electricity Generation from a Microbial Fuel Cell Employing *Desulfovibrio Saalexigens*[J]. *Journal of Electrochemistry*, 2007 , 13(2): 119-121.

DOI: 10.61558/2993-074X.1791

Available at: <https://jelectrochem.xmu.edu.cn/journal/vol13/iss2/1>

This Article is brought to you for free and open access by Journal of Electrochemistry. It has been accepted for inclusion in Journal of Electrochemistry by an authorized editor of Journal of Electrochemistry.

---

## Electricity Generation from a Microbial Fuel Cell Employing *Desulfovibrio Salexigens*

### Authors

Ping DING, Hai-bo SHAO, Guang-zhou LIU, Dong-xia DUAN, Ting MA, Si-jun CHEN, Jian-ming WANG, and Jian-qing ZHANG

### Corresponding Author(s)

## Electricity Generation from a Microbial Fuel Cell Employing *Desulfovibrio Salexigens*

DING Ping<sup>1</sup>, SHAO Hai-bo<sup>1\*</sup>, LIU Guang-zhou<sup>2</sup>, DUAN Dong-xia<sup>2</sup>,  
MA Ting<sup>1</sup>, CHEN Si-jun<sup>1</sup>, WANG Jian-ming<sup>1</sup>, ZHANG Jian-qing<sup>1,3</sup>

(1. Department of Chemistry, Zhejiang University, Hangzhou 310027, China,  
2. Research Institute 725, Qingdao Branch, Qingdao 266071, Shandong, China,  
3. Chinese State Key Laboratory for Corrosion and Protection, Shenyang 110015, China)

**Abstract:** A microbial fuel cell of laboratory scale employing *Desulfovibrio salexigens* in lactate based seawater substrate was proposed. Electricity was continuously harvested after inoculation. During 20 days of fermentation/discharge, COD values of the substrate decreased by 61.7%, in which 9.81% was converted to electricity.

**Key words:** MFC; *Desulfovibrio salexigens*; electricity generation

**CLC Number:** TM 911.45

**Document Code:** A

### 1 Introduction

Employing microorganisms as catalysts, microbial fuel cells (MFCs) convert biochemistry energy directly into electricity<sup>[1]</sup>. In addition to the advantages of conventional fuel cells, MFCs have their own operational and functional advantages. First, MFCs can use widespread bio-convertible substrate as fuels, including various of bio-mass, even domestic wastewater<sup>[2-3]</sup>, underwater sediments<sup>[4-5]</sup> and some minerals<sup>[6]</sup>. Second, MFCs usually operate at ambient temperature and pressure, resulting in unnecessary to input energy. Third, MFCs have potential for application not only for harvest electric energy but also for bioremediation of organic contaminants.

For application purpose, it is convenient to use mixed cultured bacteria in MFCs<sup>[7]</sup>. With well-documented mixed consortium, power density as large

as 3.6 W m<sup>-2</sup> or 216 W m<sup>-3</sup> was achieved<sup>[8]</sup>. However, use of axenic cultured bacteria<sup>[9]</sup> can reduce side fermentation (e. g. evolution of methane), and make it easier to analyze the mechanism. Herein we report a MFC based on a sulfate-reducing bacterium, *Desulfovibrio salexigens*.

### 2 Experimental Details

#### 2.1 MFC Device

Figure 1 showed the schematic diagram and the photograph of the MFC of laboratory scale. The electrode cover and anodic/cathodic chamber were produced by PMMA. The anodic chamber was also fermentation room, with volume of 80 mL. The anode was made of two catalyst layers (CoS as catalyst<sup>[10]</sup>) compressed on a foam nickel collector. The cathode was a classical air cathode, which was made up of a catalyst layer (Pt-C as catalyst) and a waterproof lay-

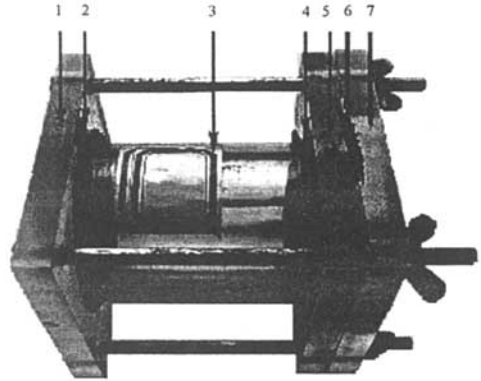
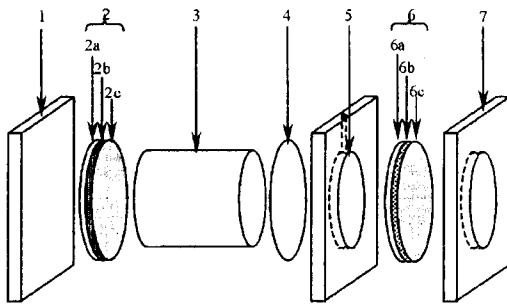


Fig. 1 Prototype of MFC based on *Desulfovibrio salexigens*

1) Cover of anode, 2) Anode (2a, 2c: catalyst layers, 2b: collector), 3) Anodic Chamber, 4) CEM, 5) Cathodic chamber, 6) Cathode (6a: catalyst layer, 6b: collector, 6c: water-proof layer), 7) Cover of cathode

er compressed on a silver wire net collector. Cation exchange membrane (CEM) was used to provide ionic conduction while separating the anodic and cathodic chamber.

### 2.2 Culture of Bacterium

The bacterium *Desulfovibrio salexigens* was separated from undersea sediment near Qingdao (provided by Research Institute 725, Qingdao Branch), and cultured in MFC with lactate based seawater substrate, which contained  $9.0 \text{ mL} \cdot \text{L}^{-1}$  60% sodium lactate,  $1.0 \text{ g/L}$  barn powder,  $0.25 \text{ g/L}$  vitamin C,  $2.0 \text{ g} \cdot \text{L}^{-1} \text{MgSO}_4$ ,  $0.5 \text{ g} \cdot \text{L}^{-1} \text{Na}_2\text{SO}_4$ ,  $1.0 \text{ g} \cdot \text{L}^{-1} \text{NH}_4\text{Cl}$ ,  $0.5 \text{ g} \cdot \text{L}^{-1} \text{K}_2\text{HPO}_4$  and  $0.1 \text{ g} \cdot \text{L}^{-1} \text{CaCl}_2$ , with pH 7.2 and under  $30 \text{ }^\circ\text{C}$ .

### 2.3 Electrochemical Measurements

The discharge curve was carried out with Arbin BT-2000 battery testing system (Arbin Instruments,

US). Electricity was continuously harvested from the MFC after inoculation, with an outer resistance load of  $1000 \text{ } \Omega$ .

### 3 Results and Discussion

Fig. 2 showed the probable working principle of the MFC. Organic compounds, mainly lactate, were fermented by the bacterium to produce metabolite, mainly acetate and  $\text{CO}_2$ , while the electrons were transferred to sulfate, which was reduced to sulfide. Then the latter was oxidized at the anode to generate electricity. Meanwhile the by-product, proton, transferred through CEM to the cathode, and combined oxygen and electron to produce water.

The current dropped fast at the very beginning several hours (Fig. 3). However, it remained relatively constant at subsequent long time (about 360 h,

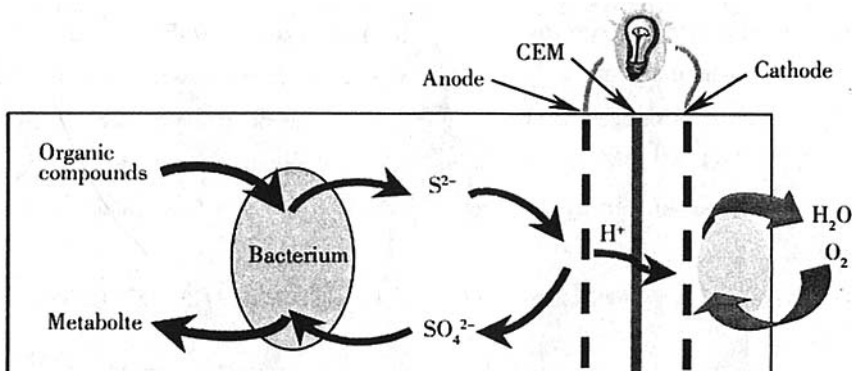


Fig. 2 Probable working principle of the MFC

15 d), which indicated that the system was in stable state. That is, sulfide generation rate was approximately equal to its consumption rate, and the remained sulfide kept constant concentration. Later, with the consumption of nutrients in substrate, metabolism of the bacterium was gradually inhibited, and the output current decreased sharply at the end of discharge.

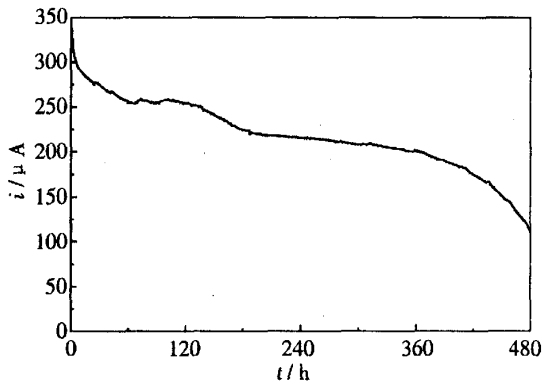


Fig. 3 Discharging curve of the MFC at constant resistance of 1000 ohm

In order to estimate the organic compound decomposed by the bacterium, COD values were measured before and after fermentation/discharge. The initial value  $6480 \text{ mg} \cdot \text{L}^{-1}$  dropped to  $2480 \text{ mg} \cdot \text{L}^{-1}$  after 20 days of fermentation/discharge. According to Faradic Law, it was calculated that 9.81% of the consumed COD was transferred to electricity.

## References:

- [1] BAO Yue (宝玥), WU Xia-qin (吴霞琴). Progress in research for biofuel cell [J]. *Electrochemistry (in Chinese)*, 2004, 10(1):1-8.
- [2] He Z, Minteer S D, Angenent L T. Electricity generation from artificial wastewater using an upflow microbial fuel cell [J]. *Environ Sci Technol*, 2005, 39: 5262-5267.
- [3] Liu H, Ramnarayanan R, Logan B E. Production of electricity during wastewater treatment using a single chamber microbial fuel cell [J]. *Environ Sc Technol*, 2004, 38: 2281-2285.
- [4] Bond D R, Holmes D E, Tender L M, et al. Electrode-reducing microorganisms that harvest energy from marine sediments [J]. *Science*, 2002, 295:483-485.
- [5] Reimers C E, Tender L M, Fertig S, et al. Harvesting energy from the marine sediment-water interface [J]. *Environ Sci Technol*, 2001, 35:192-195.
- [6] Rhoads A, Beyenal H, Lewandowski Z. Wireless sensors powered by microbial fuel cells [J]. *Environ Sci Technol*, 2005, 39(13):5037-5042.
- [7] Tender L M, Reimers C E, Stecher H A, et al. Harnessing microbially generated power on the seafloor [J]. *Nat Biotechnol*, 2002, 20(8):821-825.
- [8] Rabaey K, Lissens G, Siciliano S D, et al. A microbial fuel cell capable of converting glucose to electricity at high rate and efficiency [J]. *Biotechnol Lett*, 2003, 25(18):1531-1535.
- [9] Bond D R, Lovley D R. Electricity production by *Geobacter sulfurreducens* attached to electrodes [J]. *Appl Environ Microbiol*, 2003, 69(3): 1548-1555.
- [10] Petrov K, Srinivasan S. Low temperature removal of hydrogen sulfide from sour gas and its utilization for hydrogen and sulfur production [J]. *Int J Hydrogen Energy*, 1996, 21(3): 163-169.

# 应用需盐脱硫弧菌的微生物燃料电池发电研究

丁平<sup>1</sup>, 邵海波<sup>1\*</sup>, 刘光洲<sup>2</sup>,

段东霞<sup>2</sup>, 麻挺<sup>1</sup>, 陈嗣俊<sup>1</sup>, 王建明<sup>1</sup>, 张鉴清<sup>1,3</sup>

(1. 浙江大学化学系, 浙江 杭州, 310027; 2. 七二五研究所青岛分部, 山东 青岛, 266071;

3. 金属腐蚀与防护国家重点实验室, 辽宁 沈阳, 110015)

**摘要:** 本文提出了基于需盐脱硫弧菌以含乳酸盐的海水培养基为电解液的微生物燃料电池. 微生物接种后电池即开始放电, 在 20 天中, 培养基 COD 降低了 61.7%, 其中有 9.81% 转化为电能.

**关键词:** 微生物燃料电池; 需盐脱硫弧菌; 发电